

# Push-button Type Photomicro Sensors



## BS5-P Series PRODUCT MANUAL

**For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.**

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

### Features

- Button operation enables accurate detection regardless of material, color, or reflectance of target object
- "Optimized for transport detection of semiconductor wafer enclosures (FOUP, FOSB, etc.)"
- Optical detection of button operation guarantees 5 million operations of the mechanical life cycle
- Total of 4 red LED indicators (side:2, top:2) for higher visibility of operation status
- Increased product durability with steel mounting brackets
- Emitter OFF function and check stable operation functions
- Built-in reverse polarity protection circuit and output short overcurrent protection circuit

### Safety Considerations

- Observe all 'Safety Considerations' for safe and proper operation to avoid hazards.
- ⚠ symbol indicates caution due to special circumstances in which hazards may occur.

**⚠ Warning** Failure to follow instructions may result in serious injury or death.

- 01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss. (e.g., nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.)**  
Failure to follow this instruction may result in personal injury, economic loss or fire.
- 02. Do not use the unit in the place where flammable/explosive/corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact or salinity may be present.**  
Failure to follow this instruction may result in explosion or fire.
- 03. Do not disassemble or modify the unit.**  
Failure to follow this instruction may result in fire.
- 04. Do not connect, repair, or inspect the unit while connected to a power source.**  
Failure to follow this instruction may result in fire.
- 05. Check 'Connections' before wiring.**  
Failure to follow this instruction may result in fire.

**⚠ Caution** Failure to follow instructions may result in injury or product damage.

- 01. Use the unit within the rated specifications.**  
Failure to follow this instruction may result in fire or product damage.
- 02. Use a dry cloth to clean the unit, and do not use water or organic solvent.**  
Failure to follow this instruction may result in fire.

### Cautions during Use

- Follow instructions in 'Cautions during Use'. Otherwise, It may cause unexpected accidents.
- When connecting an inductive load such as DC relay or solenoid valve to the output, remove surge by using diodes or varistors.
- Use the product after 0.1 sec of the power input.  
When using a separate power supply for the sensor and load, supply power to the sensor first.
- 12-24 VDC  $\equiv$  model power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Wire as short as possible and keep it away from high voltage lines or power lines to prevent surge and inductive noise.
- When using switching mode power supply (SMPS), ground F.G. terminal and connect a condenser between 0V and F.G. terminal to remove noise.
- When using a sensor with a noise-generating equipment (e.g., switching regulator, inverter, and servo motor), ground F.G. terminal of the equipment.
- This unit may be used in the following environments.
  - Indoors (in the environment condition rated in 'Specifications')
  - Altitude max. 2,000 m
  - Pollution degree 2
  - Installation category II

## Ordering Information

This is only for reference, the actual product does not support all combinations. For selecting the specified model, follow the Autonics website.

**BS 5 - P 1 M ① - ②**

### ① Operation mode

L: Light ON (Unpressed button, indicator + output ON)

D: Dark ON (Pressed button, indicator + output ON)

### ② Control output


No mark: NPN open collector output

P: PNP open collector output

## Cautions during Installation

- Be sure to install this product by following the usage environment, location, and specified ratings. Consider the listed conditions below.
  - Installation environment
  - Button stop position, output switching position, and operation limit position
  - Operation load
- Use the M3 flat head screw to install, tighten with a torque of 0.59 N m or less. That could decrease the product's water resistance.
- Do not impact with a hard object or bend the cable excessively.
- Do not pull the cable with a tensile strength of 30 N or over. Failure to follow this instruction may result in fire due to the open circuit.
- Use this product after the test. Check whether the indicator works appropriately for the positions of the detectable object.
- On the non-flush surface, install this product after inserting a spacer, as shown in [Fig. 1].


[Fig. 1]

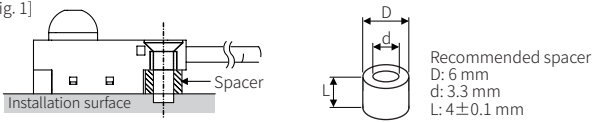

## Operation timing chart


Operation mode	Light ON	Dark ON
Button	Pressed Unpressed	Pressed Unpressed
Received light	Received Interrupted	Received Interrupted
Operation indicator (red)	ON OFF	ON OFF
Transistor output	ON OFF	ON OFF

## Connections

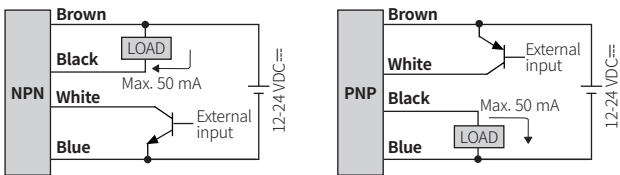


## Circuit

### ■ NPN open collector output

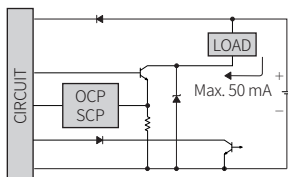

### ■ PNP open collector output

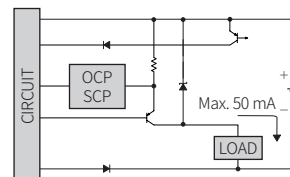

- OCP (over current protection), SCP (short circuit protection)
- If short-circuit the control output terminal or supply current over the rated specification, normal control signal is not output due to the protection circuit.


## External Input Functions

You can connect the control wire (white) to an external device for the emitter OFF and check stable operation function

- Be sure to use a transistor that opens and closes 50 mA/10 V, and over 1/8 W resistors. Failure to follow this instruction may result in product damage.
- If the functions are not used, insulate the control wire (white).


### ■ Emitter OFF function

When the signal input occurs without pressing the button, you can check the receiver's operation by stopping the emitter.

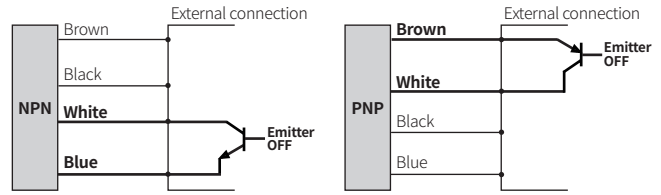


### ■ Check stable operation function

Without pressing the button, it reduces the LED intensity by about 20% and checks that the receiver is still receiving light (transistor ON). It helps to check in advance for malfunctions due to a decrease in the LED intensity.

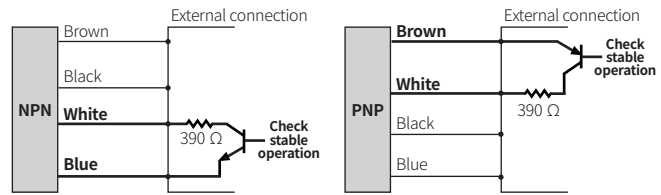


### ■ Emitter OFF function+ Check stable operation function

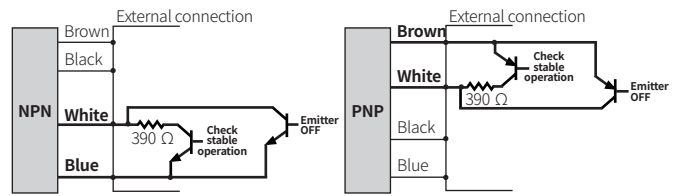

## Dimensions


- Unit: mm, For the detailed drawings, follow the Autonics website.

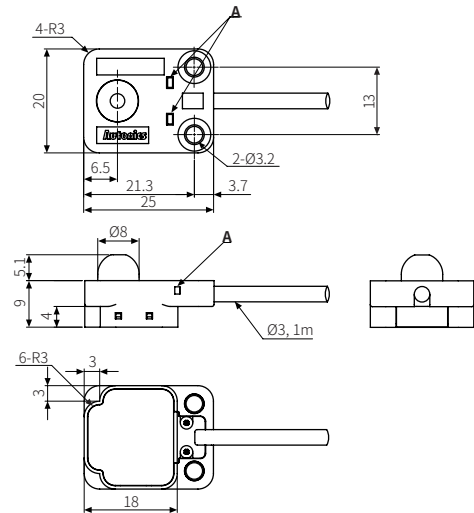

A Operation indicator (red)

## Specifications

<b>Model</b>	BSS-P1M□-□
<b>Sensing type</b>	Push button type
<b>Button stop position <sup>01)</sup></b>	5.0 ± 0.4 mm
<b>Button output switching position <sup>01)</sup></b>	4.0 ± 0.5 mm
<b>Button operation limit position <sup>01)</sup></b>	≤ 0 mm
<b>Operation load <sup>01)</sup></b>	≤ 3 N
<b>Light source</b>	Infrared LED
<b>Peak emission wavelength</b>	940 nm
<b>Emitter OFF</b>	YES (External input <sup>02)</sup> )
<b>Check stable operation</b>	YES (External input <sup>02)</sup> )
<b>Operation mode</b>	Light ON (Unpressed button, indicator + output ON) / Dark ON (Pressed button, indicator + output ON) mode model
<b>Indicator</b>	Operation indicator (red)
<b>Approval</b>	CE ENEC
<b>Unit weight (packaged)</b>	≈ 30 g (≈ 50 g)

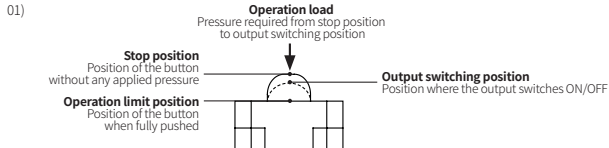

02)

External input	NPN output	PNP output
<b>Emitter OFF</b>	Short at 0 V or ≤ 0.25 VDC≐ (outflow current ≤ 30 mA)	Short at +V or +V ≥ -0.25 VDC≐ (absorption current ≤ 30 mA)
<b>Emitter ON</b>	Open (leakage current ≤ 0.4 mA)	Open (leakage current ≤ 0.4 mA)
<b>Response time</b>	≤ 1 ms	

<b>Power supply</b>	12-24 VDC≐ ±10% (ripple P-P: ≤ 10%)
<b>Current consumption</b>	≤ 35 mA
<b>Control output</b>	NPN open collector output / PNP open collector output model
Load voltage	≤ 26.4 VDC≐
Load current	≤ 50 mA
Residual voltage	NPN: ≤ 1.5 VDC≐, PNP: ≤ 1.5 VDC≐
<b>Protection circuit</b>	Reverse power protection circuit, output short overcurrent protection circuit
<b>Insulation resistance</b>	≥ 20 MΩ (250 VDC≐ megger)
<b>Noise immunity</b>	±240 VDC≐ the square wave noise (pulse width: 1 μs) by the noise simulator
<b>Dielectric strength</b>	1,000 VAC~ at 50/60 Hz for 1 min
<b>Vibration</b>	1.5 mm double amplitude at 10 to 55 Hz frequency in each X, Y, Z direction for 2 hours
<b>Shock</b>	500 m/s <sup>2</sup> (≈ 50 G) in each X, Y, Z direction for 3 times
<b>Mechanical life cycle</b>	≥ 5,000,000 operations (1 operation = stop position - operation limit position - stop position)
<b>Ambient illumination (receiver)</b>	Fluorescent lamp: ≤ 1,000 lx
<b>Ambient temperature</b>	-20 to 55 °C, storage: -25 to 70 °C (no freezing or condensation)
<b>Ambient humidity</b>	35 to 85 %RH, storage: 35 to 85 %RH (no freezing or condensation)
<b>Protection rating</b>	IP40 (IEC standard)
<b>Connection method</b>	Cable type
<b>Cable spec.</b>	Ø 3 mm, 4-wire, 1 m
<b>Wire spec.</b>	AWG28 (0.08 mm, 19-core), insulator outer diameter: Ø 0.88 mm
<b>Material</b>	Case: PC + G, button: POM, sleeve: SUS304